

HV RELAYS
HV SWITCHES
HV CONTACTORS
HV MEASUREMENT
HV ENERGY STORAGE
HV SAFETY & ACCESSORIES
HV RESISTIVE OR CAPACITIVE LOADS

ISO 9001:2008
QMS CERTIFIED



HV PROBES
HV DIVIDERS
HV VOLTMETERS
HV HIGH CURRENT
HV CALIBRATION LAB
ELECTRONIC & HIGH POWER
HV HIPOTS TO 50kV DC / 100kV DC

HIGH VOLTAGE DEVICES



10V to 1,000,000V MicroAmps to 1,700,000 Amps PK Pulse DC to 10MHz

ROSS ENGINEERING CORPORATION

540 WESTCHESTER DRIVE
CAMPBELL, CA 95008
UNITED STATES

U.S. TOLL FREE: 1-800-654-3205
PHONE: (408) 377-4621
FAX: (408) 377-5182

www.rossengineeringcorp.com
e-mail: info@rossengineeringcorp.com

HIGH VOLTAGE DEVICES

HIGH VOLTAGE RELAYS

1kV to 300kV
1mA to 800 Amps

3"



EE12
12kV



ES12
12kV



ET2-14
14kV



EA25
25kV



E40
40kV



E60
60kV



E70 - 70kV
Gravity Return,
Mount Base Up



ED150 - 150kV
Gravity Return,
Mount Base Down


12"

ACTUATORS 12V TO 250V DC, 24V TO 480V 25-80Hz OR AIR PRESSURE 40-125 PSI

HIGH VOLTAGE RELAYS

Air insulated types for isolating loads, tap selection, safety discharge & grounding to help meet OSHA & other safety regulations. Ratings from 1mA to 800 Amps continuous, to 100,000 Amps capacitor discharge. Peak 1 minute test voltages from 5 to 300kV. Single or Multi-pole. Auxiliary contacts optional on all types. Options include latching, extended life, and tungsten contacts available for high current closing. DC, 25-800Hz & air pressure actuation available. Also usable in oil or insulating gas with increased ratings.

4"



E25-NC-25-1-0
25kV PK TEST

AIRPORT LIGHTING HV CONTROL RELAYS

Reliable single pole and 2-pole HV Relays developed for use for switching airport runway lighting with over 20 years of trouble-free use up to 2400V, 50/60Hz, up to 20 Amps maximum interrupt, has been now upgraded to also handle up to 5000V 50/60Hz, 12 Amps maximum interrupt. Unit is air insulated, does not require vacuum, oil or sulfurhexafluoride insulation or a leak tight container. Has 25 to 100 Amps maximum continuous capability, a peak 1 minute test of 10 to 28kV RMS and operates with 115V or 230V 50/60Hz actuator.

6"



E40-2PNO
40kV PK TEST

DELAYED OPEN OR CLOSE HV RELAYS

High Voltage Relays with automatic delay but positive closing or opening after turn on, turn-off, or loss of power. They are designed for safety shorting, or current flow which must not be initiated or interrupted accidentally before a prescribed time after actuation or shutdown.

6"



E40-NC-40-1-0-ZA,
1-3 SECONDS DELAY TO CLOSE
40kV PK TEST

HIGH VOLTAGE REED RELAYS

5,000V TO 15,000V PK TEST

3 Amps Continuous. 50 to 100 Volt Amps Max Interrupt. 6V DC to 115V 50/60 Hz coil. Choice of terminal type or HV leads.

1"



RR1A07Q24
SPNO
7kV PK TEST
QUICK DISCONNECT TERMINALS
24V DC ACTUATOR



RR1C07H24S
SPNO
7kV PK TEST
HOOK, SOLDER TERMINALS
24V DC ACTUATOR
STUD MOUNTING

ISO 9001:2008
QMS CERTIFIED



ROSS ENGINEERING CORP.

540 Westchester Dr., Campbell, CA 95008
PHONE:(408)377-4621 FAX:(408)377-5182
www.rossengineeringcorp.com
e-mail: info@rossengineeringcorp.com



HIGH VOLTAGE DEVICES

WIDEBAND HV VOLTAGE DIVIDERS

1kV to 1000kV
DC-10 MHz

3"



VD5
5kV

VD15
15kV

VD60
60kV



VD75
75kV



VD120-Indoor
120kV



VD120-Outdoor
120kV



VD150
150kV

27"



VD450
450kV

Precision compensated resistive-capacitive Voltage Dividers for DC up to 10MHz or to 0.02 microsecond rise time pulse. 1000/1 ratio matched to 1 megohm 20 to 50pF display or recorder. Other ratios and loads as required. Accuracy and stability: 0.01% to 0.1% DC, 0.04% to 1% AC, 3% DC-1MHz, 3dB to 10MHz. For use in air, oil, or gas. Contact Ross Engineering Corp. for complete accuracy specifications.

HIGH VOLTAGE MEGMETER®, HIPOT to 50kV

HV Insulation Leakage Current & HV Resistance Measurement Meter. HV Vacuum Interrupter Tester. Portable, 12V battery or 115V AC operated. 0-15kV DC 0.001µA to 260µA or to 2000µA. 0-42kV DC 0.001µA to 130µA or to 750µA. 0-50kV DC 0.001µA to 1200µA.

7"



VMT-15
0-15kV DC

VMT-42
0-42kV DC
VMT-50
0-50kV DC

FOR TESTING HV VACUUM INTERRUPTERS, HV CABLES & HV INSULATION

HIGH VOLTAGE CALIBRATION LAB to 450KV ISO/IEC 17025:2005 ACCREDITED

Calibration of HV Voltage Dividers, HV Voltmeters, HV Probes and HV Equipment to NIST standards. AC and DC includes multiple test points and certificate. 1kV up to 450kV PK AC & Impulse, 400kV DC.



FOR THE CALIBRATIONS

TO WHICH A2LA ACCREDITATION APPLIES, PLEASE REFER TO THE LABORATORY'S CALIBRATION SCOPE OF ACCREDITATION.

DIGITAL AC HIPOT

0-50kV RMS, 0-60kV RMS, 0-100kV RMS, 0-130kV RMS

Specifically designed for Calibrating High Voltage Measurement Devices or Testing High Voltage Equipment, Insulation and optionally HV Vacuum Interrupters or other HV Vacuum Devices. 115V or optional 230V AC operated, 50/60Hz.

12"



100kV RMS
AC Hipot

130kV RMS
AC Hipot



MOBILE HV
TRANSFORMER
60kV, 100kV RMS

36"

PERSONAL GROUNDING RODS

Personal Grounding Rods temporarily ground or discharge (with current limiting if required) 50V-400kV electronic equipment that could present a safety problem. Rods are hooked on to HV terminals, or other points where contact will ground the device. Designs conform to OSHA clearance requirements and provide the correct handle and cable length to keep personnel away from hazardous high voltage

1"



NOT FOR HIGH
CURRENT UTILITY
POWER LINE USE

ISO 9001:2008
QMS CERTIFIED



ROSS ENGINEERING CORP.

540 Westchester Dr., Campbell, CA 95008
PHONE:(408)377-4621 FAX:(408)377-5182
www.rossengineeringcorp.com
e-mail: info@rossengineeringcorp.com



HIGH CURRENT SWITCHES

40"



Models are available up to 20,000 Amps continuous, and over 1,700,000 Amps 20μsec pulse, with voltage ratings of 6 volts to 400kV peak test. Many are air cylinder or motor operated for high contact force. DC to 1MHz.

GD27-P-40-8000
27kV PK TEST
8000A CONTINUOUS

TOROIDS, SPHERES, CORONA NUTS & SHIELDS

1"



<p>Spheres Sizes 0.2" to 22" 0.5cm to 56cm</p>	<p>Toroids sizes 0.75" to 52" 1.9cm to 132cm</p>
--	--


Geometrically designed to avoid excessive voltage gradients at connecting points and other areas needing shielding or balancing of electrostatic fields to increase withstand voltage and minimize corona. Many diameters are to international standard metric sizes.

Non melting solid carbon spheres available for long life spark gaps

HIGH VOLTAGE ROTARY SWITCHES

Ratings from 5 to 150kV, 1 to 200 Amps. Either manual or electrical operators, depending upon requirements. Position detents and interlocks to prevent opening under load.

6"

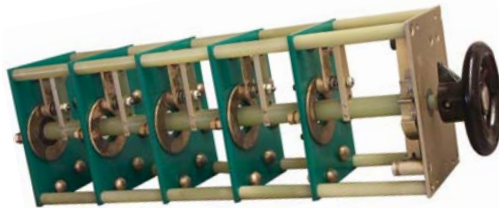

Available up to 50 Poles

R30-
5 POLES
30kV PK TEST


MULTIPOLE HIGH VOLTAGE RELAYS

12kV, 25kV, 40kV, 60kV PK Test

12"



E25-2PDT-25
Vertical



E25-2PDT-25
Low Profile

The E Series Multipole High Voltage Relays are designed for high voltage applications where multiple poles are required.

HIGH POWER RF SWITCHES

High Voltage RF Switch designed and manufactured for high power communication transmitters. Up to 450kV PK test 6000 Amps RMS. Motor or air actuated. Single throw or double throw.

3000 Amps Continuous 13KHz
1500 Amps Continuous 30KHz

GD450-DOUBLETHROW
450kV PK TEST
1500 AMPS,
30KHz



HIGH SHOCK RELAYS

10"



E30-DT-40-G
30kV PK TEST

Developed and manufactured for shipboard explosion resistance 250G shock, 27kV, double throw, DC-400Hz actuator. 100 Amps Continuous

ISO 9001:2008
QMS CERTIFIED



ROSS ENGINEERING CORP.

540 Westchester Dr., Campbell, CA 95008
 PHONE:(408)377-4621 FAX:(408)377-5182
www.rossengineeringcorp.com
 e-mail: info@rossengineeringcorp.com



ISO/IEC 17025:2005
 CALIBRATION CERT #2746.01

HIGH VOLTAGE DEVICES

POWER QUALITY AND LINE DISTURBANCE 1KV-1000KV MEASUREMENT & RECORDING

Power class sensors, Wideband Voltage Dividers for use with DRANETZ/BMI, RPM, FLUKE, TEKTRONIX, YOKOGAWA & other recorders.

Matched to:
DRANETZ / BMI

VD120
38kV RMS
POWER
CLASS

INDOOR **OUTDOOR**

PowerGuide 4400 **MeasuringPad**

FLUKE

430 Series **1735 Three-Phase Power Logger**

23" height indicator

HV PROBES & HV VOLTMETERS FOR OSCILLOSCOPES, DVMS, RECORDERS

HV DC, AC & Wideband DC-10MHz. Safety probes for any scope, digital display or recorder. Also available complete with large 4 1/2 digit display 0.01% to 5% DC/AC accuracy digital voltmeter, with safety handles for OSHA recommended personnel clearances. With attached or separate digital display or multimeter 0.00001V to 400kV.

VMD2A-200-DC-10MHz DVM
BATTERY/AC POWERED

6" height indicator

HV PROBE TO 400kV DC-1MHz

WEATHERPROOF WIDEBAND HIGH VOLTAGE DIVIDERS

High accuracy 5kV RMS to 345kV RMS power class. 30kV PK to 1000kV PK operate. 60kV to 1350kV basic impulse level. DC to over 1MHz frequency response. For DC, AC power quality, line disturbance & transient measurement and recording.

60" height indicator

VD1000-20-T-KB-B
1,000,000V DC OR PK AC OPERATE

HV DIGITAL MULTIMETERS

Wideband DC-10MHz. VMD2A 4 1/2 digit portable meter has accuracies to 0.01% DC, 0.1% 50/60Hz, 3% DC-1MHz, 3dB to 10MHz. True RMS, Avg, True +PK, -PK, PK to PK, 0.2 microsecond, 1/2 sine single pulse capture & hold. 0.00001V - 1000V DC or PK AC and for use with HV Probes to 400kV and Voltage Dividers to 1,000,000V. Has 2V output to scope, recorder.

VMD2A MULTIMETER

6" height indicator

VD30-12.5Y-A-LB-A,
30kV PK OPERATE
VOLTAGE DIVIDER

WIDEBAND FIBER OPTIC TRANSMISSION DC-1MHz & 50-75 OHM OUTPUT COAXIAL CABLE DRIVER DC-35MHz

AC or 12V DC rechargeable battery/AC operated. Systems have a maximum output of 10V PK (20V PK to PK) 10mA and a maximum signal input of 10V PK. Useful from 0.1V, and to over 1000kV when used with Ross HV Wideband Dividers. Single or multiple ranges.

FIBER OPTIC TRANSMITTER AND RECEIVER



DC - 1MHz
1000MΩ 30pF INPUT IMPEDANCE

COAXIAL CABLE DRIVER



DC - 35MHz
1MΩ 30pF INPUT IMPEDANCE

4" height indicator

INSTRUMENT POWER ISOLATOR TO 400kV ISOLATION, VERY LOW CAPACITANCE, ELIMINATES BATTERIES

25" height indicator

Isolated Instrumentation

5-50VA Motor / Generator Type

> 150kV PK Isolation

< 1 Picofarad

115V, 230V AC Motor

50-1000VA
115/230V 50/60Hz Transformer Type
60kV PK Isolation
< 20 Picofarad

**ISO 9001:2008
QMS CERTIFIED**



ROSS ENGINEERING CORP.

540 Westchester Dr., Campbell, CA 95008
PHONE:(408)377-4621 FAX:(408)377-5182
www.rossengineeringcorp.com
e-mail: info@rossengineeringcorp.com



HIGH VOLTAGE DEVICES

LOW PROFILE VACUUM CONTACTOR

208V TO 15.5kV 50/60Hz



12"

HG3 Low Profile
200, 400, 600, 1200 Amp
2000 to 28000 Amp Interrupt

1½ to 2 cycle interrupt. Highly reliable vacuum interrupting capability of up to 750MVA at 15.5kV AC, with momentary current to 20,000 Amps RMS, 56,000

Amps PK-PK for 10 cycles, and 40,000 Amps RMS for one cycle fuse protected. Three SPDT form C, 15A, 480V AC auxiliary contacts are standard and up to four may be specified.

HV VACUUM CONTACTORS & CIRCUIT BREAKERS



30"

HB-204-
200kV
PK TEST
200-1200 AMP



HA3-73-110-600-AMP
5-15.5kV CLASS
to 38kV RMS CLASS

208V TO 300kV AC OR DC, 50A TO 2000A CONTINUOUS, 10A DC TO 28000A AC ½ TO 1 CYCLE INTERRUPT.

Hi-Z® HIGH VOLTAGE VOLTMETERS

SAFE POWER LINE USE AC / DC TO 100kV

For phasing, capacitance tap or direct line measurement and hot line indication. Power class safe, portable all solid state, 0.5% to 5% accuracy. Shielded high voltage measurement with minimum circuit loading. 0.001V to 100kV AC or AC/DC. 125kV to 300kV BIL. Ideal for use with elbow capacitance tap voltage test points. For cable test points and direct line voltage and phasing, or differential measurement. Analog or Digital available.



4"

ALSO HOT LINE
INDICATION

VM50D METER

Ranges: 0-200V, 2kV, 20kV,
25kV, 50kV or 100kV RMS AC

FOR UTILITIES, CONTRACTORS & EMERGENCY SERVICES

VACUUM CONTACTORS WITH HIGH SPEED CONTACT OPENING AND ENERGY STORAGE DRIVERS



12"

HAF-73-



ENERGY STORAGE
SCR CONTROL
HCB-5-C-E-E

As low as 1 millisecond contact opening or closing, is available with ratings from 300V to 300kV and 50 to 1200 Amps continuous, 10 Amps DC to 12,000 Amps AC interrupt, 40,000 Amps momentary.

Energy Storage Driver, 400 joules or more, 115V or 240V AC powered, 50V to 1000V 20 microsecond trigger.

COLLAPSIBLE HOT STICKS

18"



INSULATED HANDLES

Designed to maintain proper safety clearances from hazardous High Voltage while hand holding a test instrument. The 1¼in or 1½in diameter sections of the Hotstick form a rigid handle from 1½ft to 18ft in length with 100kV/foot test voltage, depending on your specific needs.

HIGH VOLTAGE SPHERICAL RELAYS



12"

DH-300-NC-40-2-0
300kV PK TEST

Ultra high voltage, low corona, transfer, polarity reversing, and grounding relays of the air insulated type. Ratings up to 600kV PK at 100 Amps continuous. Solenoid, motor or air cylinder operated and spring or gravity return.

ISO 9001:2008
QMS CERTIFIED



ROSS ENGINEERING CORP.

540 Westchester Dr., Campbell, CA 95008

PHONE:(408)377-4621 FAX:(408)377-5182

www.rossengineeringcorp.com

e-mail: info@rossengineeringcorp.com



ISO/IEC 17025:2005
CALIBRATION CERT #2746.01

HIGH VOLTAGE DEVICES

SOLENOID-SAVER® 24V to 300V AC/DC

For high pull-in current, low holding current 25-800Hz AC or DC solenoid actuators to prevent coil burnout, lower coil temperature rise and increase pull-in and holding forces. Eliminates AC hum. Can provide optional low current, low voltage control with 5mA 4-10V or other signal, optional delayed activation or deactivation, or optional high speed energy storage activation. Will allow any DC or AC solenoid to be used at DC or 25-800Hz.



2"

HV ADJUSTABLE SPARK GAPS

6"



SG-40-H
4-40kV PK

Non-melting carbon spheres, and heavy wall aluminum spheres, .2" to 22", 0.5cm to 56cm DIA. With dust tight transparent covers 2kV to 88kV. Open style to 670kV. Micrometer type calibrating devices.

AC SOLENOIDS

3"



AC Quiet. DC to 800Hz. Class B or H Insulation. Extendable Stroke. Universal Mounting. Higher Holding Force. Environment resistant. Optional Electronic Controller. 24V, 120V, 208V, 240V, 480V coil voltages are standard. Other voltages and frequencies are also available.

HIGH POWER, HIGH SPEED HIGH VOLTAGE CONTROL AND STEP-START SYSTEM

60"



HD3-79-110-
5-15kV CLASS, 95-110kV BIL
1200A CONTINUOUS, 28,000A INTERRUPT.

½ to 1 cycle sensing and interrupting vacuum circuit breakers. Metal enclosed for indoor or outdoor applications. 5kV-38kV. Step-Start systems to minimize inrush current. 200-1,200 Amps Continuous, 2,000-28,000 Amps Interrupt.

ESD TESTER

For static discharge testing 0-5kV, 0-30kV, 0-300kV. It incorporates high voltage relays to safety ground, charge, and dump a 50PF to 2MFD, 25kV capacitor into the appropriate device under test. Portable system utilizing

24"




120V AC power to operate. It is a high reliability device capable of many thousands of cycles.

ESD-40

HV LOADS

1kV TO 300kV
2 TO 200 KILOWATTS



ISO 9001:2008
QMS CERTIFIED



ROSS ENGINEERING CORP.

540 Westchester Dr., Campbell, CA 95008
PHONE:(408)377-4621 FAX:(408)377-5182
www.rossengineeringcorp.com
e-mail: info@rossengineeringcorp.com

ACCREDITED
ISO/IEC 17025:2005
CALIBRATION CERT #2746.01

INTERNATIONAL REPRESENTATIVES

ARGENTINA

Inducor Ingenieria SA
Maximo Paz 207
Lanus Oeste - B1824KSA
Buenos Aires, Argentina
Tel: 54-11-4249-7052
Fax: 54-11-4249-7053
Email: inducor@inducor.com.ar
Website: www.inducor.com.ar

AUSTRALIA

Oxford Scientific
Unit 4, 7 Millennium Court
Silverwater NSW 2128
Tel: 02-9748-8766
Fax: 02-9748-0233
Email: sales@oxfordscientific.com.au
Website: www.oxfordscientific.com.au

AUSTRIA

PMK GmbH
Konigsteiner Str. 98
D-65812 Bad Soden am Taunus
Germany
Tel: 49-6196/5927-930
Fax: 49-6196/5927-939
Email: vertrieb@pmk-gmbh.com
Website: www.pmk-gmbh.com

BELGIUM

Pulse MC2
7 allée du Brévent
SILIC 1416 - Courcouronnes
91019 EVRY Cedex, France
Tel: 33-1-60-86-21-26
Fax: 33-1-64-97-54-98
Email: michel.chaillou@pulsemc2.fr
Website: www.pulsemc2.com

BRAZIL

G&M Comercio de Produtos Ltda.
Rua Senador Queiros 165
Santo Andre, Sao Paulo
CEP 09050-300
Tel: 55-11-4425-4245
Fax: 55-11-4426-8579
Email: marcelo@gmtestemedicao.com.br
Website: www.gmtestemedicao.com.br

CHINA - HONG KONG

Euro Tech (Far East), Ltd.
18/F Gee Chang Hong Center
65 Wong Chuk Hang Road
Tel: 852-2814-0311
Fax: 852-2870-0479
Email: conniechan.hk@euro-tech.com
Website: www.euro-tech.com

CHINA - SHANGHAI

ATIS
Test & Measurement Rep-Office Shanghai
Room 1010, UDC Building
728 XinHua Road,
Shanghai 200052, China
Tel: 86-21-62830131
Fax: 86-21-62832240
Email: Vivian.Gu@atis.com.cn
Website: www.ATIS.com.cn

ENGLAND

Glassman Europe Ltd.
21 Campbell Court
Campbell Road, Bramley
Hampshire, RG26 5EG
Tel: 44-01256-883007
Fax: 44-01256-883017
Email: sales@glassmaneuropa.co.uk
Website: www.glassmaneuropa.co.uk

FRANCE

Pulse MC2
7 allée du Brévent
SILIC 1416 - Courcouronnes
91019 EVRY Cedex, France
Tel: 33-1-60-86-21-26
Fax: 33-1-64-97-54-98
Email: michel.chaillou@pulsemc2.fr
Website: www.pulsemc2.com

GERMANY

PMK GmbH
Konigsteiner Str. 98
D-65812 Bad Soden am Taunus
Germany
Tel: 49-6196/5927-930
Fax: 49-6196/5927-939
Email: vertrieb@pmk-gmbh.com
Website: www.pmk-gmbh.com

GREECE

Electrotype Ltd
29 Simantira Str
Athens 104 45, Greece
Tel: 30-210-8544966
Fax: 30-210-8544967
Email: elektrotyp_epe@ontelecoms.gr

ISRAEL

Bentronix Ltd.
P.O. Box 2288,
Neve-Monossion, Israel 60190
Tel: 972-3-5366039
Fax: 972-3-5365781
Email: sales@bentronix.co.il
Website: www.bentronix.co.il

ITALY

Pulse MC2
7 allée du Brévent
SILIC 1416 - Courcouronnes
91019 EVRY Cedex, France
Tel: 33-1-60-86-21-26
Fax: 33-1-64-97-54-98
Email: michel.chaillou@pulsemc2.fr
Website: www.pulsemc2.com

JAPAN

Comcraft Corporation
1-2-4 Momo
Suginami-Ku
Tokyo, 167-0034
Tel: 81-3-3395-5553
Fax: 81-3-3395-5666
Email: info@comcraft.co.jp
Website: www.comcraft.co.jp

KOREA

KJ Dynatech Corp.
Suite 512, C-dong,
Woolim-Lion's Valley #371-28
Gasam-dong Gumchun-gu, Seoul 153-803
Tel: 82-2-2026-3044
Fax: 82-2-2026-3047
Email: info@kjdyna.com
Website: www.kjdyna.com

MALAYSIA

Interpadu Sdn Bhd
9-2A Jalan Pandan 3/6
Pandan Jaya, 55100 Kuala Lumpur
Tel: 603-9284-6810
Fax: 603-9282-0104
Email: inpadu@streamyx.com

NETHERLANDS

Air Parts B.V.
P.O. Box 255,
2400 AG Alphen, Aan Den Rijn
Tel: 31-172-422-455
Fax: 31-172-421-022
Email: info@air-parts.com
Website: www.air-parts.com

PERU

Energetica S.A.
Av. Victor Maurtua 140, Of. 501
Lima 27, Peru
Tel: 51-1-421-6566
Fax: 51-1-421-6536
Email: energesa@energesa.com

PORTUGAL

Pulse MC2
7 allée du Brévent
SILIC 1416 - Courcouronnes
91019 EVRY Cedex, France
Tel: 33-1-60-86-21-26
Fax: 33-1-64-97-54-98
Email: michel.chaillou@pulsemc2.fr
Website: www.pulsemc2.com

SOUTH AFRICA

Denver Technical Products (Pty) Ltd
PO Box 75810
2047 Garden View, South Africa
Tel: 11-626-2023
Fax: 11-626-2009
Email: denvertch@pixie.co.za
Website: www.denvertch.co.za

SPAIN

Pulse MC2
7 allée du Brévent
SILIC 1416 - Courcouronnes
91019 EVRY Cedex, France
Tel: 33-1-60-86-21-26
Fax: 33-1-64-97-54-98
Email: michel.chaillou@pulsemc2.fr
Website: www.pulsemc2.com

SWEDEN

High Voltage AB
Anghammargatan 4
S-721 33 Vasteras, Sweden
Tel: 46-21-120405
Fax: 46-21-120409
Email: mail@highvoltage.se
Website: www.highvoltage.se

Trinerigi AB

Halltorpsvägen 1
702 29 Örebro, Sweden
Tel: 46-19-18-86-60
Fax: 46-19-24-00-60
Email: info@trinerigi.se
Website: www.trinerigi.se

SWITZERLAND

PMK GmbH
Konigsteiner Str. 98
D-65812 Bad Soden am Taunus
Germany
Tel: 49-6196/5927-930
Fax: 49-6196/5927-939
Email: vertrieb@pmk-gmbh.com
Website: www.pmk-gmbh.com

TAIWAN, R.O.C.

Metrologies Ent. Co., Ltd.
8F, No. 30, Sec. 1, Min East Rd.
Taipei, Taiwan, R.O.C.
Tel: 886-2-2537-3650 Ext. 15
Fax: 886-2-2537-6602
Email: metrolo.gies@msa.hinet.net
Website: www.metrologies.com.tw

Additional Product Photos Appear Courtesy Of:
Dranetz/BMI Inc. & John Fluke Mfg. Co.

**ISO 9001:2008
QMS CERTIFIED**



-ROSS ENGINEERING CORP.
540 Westchester Dr., Campbell, CA 95008
PHONE:(408)377-4621 FAX:(408)377-5182
www.rossengineeringcorp.com
e-mail: info@rossengineeringcorp.com

